

GREEN'S FUNCTION FOR RF-DRIVEN CURRENT IN A TOROIDAL PLASMA

Charles F. F. Karney, Nathaniel J. Fisch, and Allan H. Reiman
Plasma Physics Laboratory, Princeton University, Princeton, NJ 08543-0451

ABSTRACT

The Green's function for rf-driven currents in a toroidal plasma is calculated in the long mean-free-path limit.

INTRODUCTION

The “adjoint” technique provides an elegant method for computing the current driven in a plasma by externally injected radio-frequency waves. This technique involves using the self-adjoint property of the linearized collision operator to express the current in terms of a Green's function, where the Green's function is proportional to the perturbed distribution in the presence of an electric field. This technique was first applied by Hirshman¹ for the case of neutral-beam driven currents in a homogeneous magnetic field. The effect of the trapped particles found in toroidal confinement systems was included by Taguchi.² The application of this technique to rf-driven currents was made by Antonsen and Chu,³ Taguchi,⁴ and Antonsen and Hui.⁵ Approximations to the Green's function have been given by a number of authors.^{5–10}

In this paper, we solve the adjoint problem numerically in toroidal geometry using the collision operator for a relativistic plasma.^{11–13} The pertinent approximations are: the device is assumed to be axisymmetric; the mean-free-path is assumed to be long compared to the device (the “banana limit”); drifts of the electrons away from the initial flux surface are neglected; in addition the expansion of the collision operator in Legendre harmonics is truncated after the $P_1(\cos \theta)$ term. By posing the problem in terms of a Green's function, we are, of course, also assuming that the plasma is close enough to equilibrium for the collision operator to be linearized, and that the wave-driven flux is known.

BASIC EQUATIONS

In the long mean-free-path limit, the electron distribution on a particular flux surface is, to low-

est order, a function of the collisionless constants of motion. We choose to express the distribution in terms of the “midplane” coordinates¹⁴ (u_0, θ_0) , the magnitude and direction with respect to the magnetic field of the momentum per unit mass (henceforth called just the momentum) at the position where the magnetic field is minimum. Measuring position on the flux surface by the length l along the field line from this point, the momentum (u, θ) at an arbitrary position is

$$u = u_0, \quad \sin^2 \theta = b \sin^2 \theta_0,$$

where $b = B(l)/B(0)$. Particles with $\sin^2 \theta_0 > \sin^2 \theta_{tr} = 1/b_{\max}$ are *trapped*; other particles are *passing*. Assuming that the rf is sufficiently weak, the distribution satisfies

$$f_m \langle \hat{C}(f/f_m) \rangle = \frac{1}{\lambda} \frac{\partial}{\partial \mathbf{u}_0} \cdot \lambda \mathbf{S}_0, \quad (1)$$

where $f_m \hat{C}(f/f_m)$ is the collision operator linearized about a Maxwellian f_m ,

$$\langle A \rangle = \frac{1}{\tau_b} \int \frac{dl}{v_{\parallel}} A$$

is the bounce-averaging operator, $\tau_b = \int dl/v_{\parallel}$ is the bounce time, $\lambda = \tau_b v_0 \cos \theta_0 / L$, and L is total length of the field line (from one intersection with the midplane to the next). $\mathbf{S}_0$ is the rf-induced flux in momentum space expressed in midplane coordinates. This is related to the local rf-induced flux $\mathbf{S}$ via

$$S_{0u} = \langle S_u \rangle, \quad S_{0\theta} = \left\langle S_{\theta} \frac{\tan \theta_0}{\tan \theta} \right\rangle.$$

We should also include a term in eq. (1) which reflects the slow heating of the background electrons.³ However, this term does not contribute to the current carried by f .

The power dissipated by the wave between two neighboring flux surfaces is

$$W = \frac{L dV}{\int dl/b} P_0, \quad (2)$$

where dV is the elemental volume between the two surfaces and

$$P_0 = m \int d^3\mathbf{u}_0 \lambda \mathbf{S}_0 \cdot \mathbf{v}_0. \quad (3)$$

The current density at the midplane is

$$J_{0\parallel} = q \int d^3\mathbf{u}_0 v_0 \cos \theta_0 f. \quad (4)$$

At an arbitrary point the current density is $J_{\parallel} = bJ_{0\parallel}$. The total toroidal current flowing between two neighboring flux surfaces is

$$I = \frac{Q}{\int dl/b} J_{0\parallel}, \quad (5)$$

where

$$Q = \int \frac{dl}{2\pi R} \frac{B_\zeta}{B}$$

is the safety factor, R is the major radius, and B_ζ is the toroidal magnetic field.

Rather than determine $J_{0\parallel}$ directly by solving eq. (1), we consider the adjoint problem,

$$\langle \hat{C}(\chi) \rangle = -q \frac{v_0 \cos \theta_0}{\lambda} \Theta, \quad (6)$$

where $\Theta = 1$ for passing particles and 0 for trapped particles. This is the equation for the perturbed electron distribution is the presence of a toroidal loop voltage TL/Q . The rf-driven current density is then given by³

$$J_{0\parallel} = \int d^3\mathbf{u}_0 \lambda \mathbf{S}_0 \cdot \frac{\partial \chi}{\partial \mathbf{u}_0}. \quad (7)$$

We will express the current drive efficiency by the ratio $\eta = J_{0\parallel}/P_0$. Another useful measure of efficiency is in terms of the macroscopic variables I and W , namely

$$\frac{I}{W} = \frac{Q}{L} \eta.$$

BOUNCE-AVERAGED COLLISION OPERATOR

The linearized collision operator is made up of three terms

$$\begin{aligned} \hat{C}(\chi) = & (C^{e/e}(f_m \chi, f_m) + C^{e/e}(f_m, f_m \chi)) \\ & + C^{e/i}(f_m \chi, f_i)/f_m, \end{aligned} \quad (8)$$

where $C^{a/b}(f_a, f_b)$ is the collision operator for distribution f_a colliding off distribution f_b . The

electron-ion term is computed in the Lorentz limit (with $m_i \rightarrow \infty$). It can be combined with the first term and bounce averaged to give

$$\begin{aligned} & \frac{1}{u_0^2} \frac{\partial}{\partial u_0} u_0^2 D_{uu} \frac{\partial \chi}{\partial u_0} + F_u \frac{\partial \chi}{\partial u_0} \\ & + \frac{D_{\theta\theta}}{u_0^2} \frac{1}{\lambda \sin \theta_0} \frac{\partial}{\partial \theta_0} \sin \theta_0 \lambda \left\langle \frac{\tan^2 \theta_0}{\tan^2 \theta} \right\rangle \frac{\partial \chi}{\partial \theta_0}, \end{aligned}$$

where D_{uu} and F_u are the coefficients of energy diffusion and drag due to electron-electron collisions, and $D_{\theta\theta}$ is the pitch-angle scattering coefficient due to collisions with both electrons and ions. These are given by one-dimensional integrals over a Maxwellian distribution.¹³

Let us now turn to the second term in eq. (8). Since χ is odd in $u_{\parallel}$, we can expand $\chi(u, \theta, l)$ in terms of spherical harmonics as follows:

$$\chi(u, \theta, l) = \sum_{k \text{ odd}} \chi_k(u, l) P_k(\cos \theta),$$

where P_k is the Legendre polynomial of degree k and $\chi_k(u, l) = (2k+1) \int_0^{\pi/2} \chi(u, \theta, l) P_k(\cos \theta) \times \sin \theta d\theta$. The linearized collision operator is a spherically symmetric, so that its angular eigenfunctions are spherical harmonics. This allows us to write the term $C^{e/e}(f_m, \chi_k(u, l) P_k(\cos \theta))/f_m$ as $\tilde{C}_k \equiv P_k(\cos \theta) I_k(\chi_k(u, l))$, where I_k is a linear integral operator. Transforming to midplane coordinates, we find

$$\chi_k(u, l) = (2k+1)b \int_0^{\pi/2} \chi(u_0, \theta_0) \tilde{P}_k \sin \theta_0 d\theta_0,$$

where $\tilde{P}_k = P_k(\cos \theta) \cos \theta_0 / \cos \theta$ and we have used the fact that χ is zero for trapped particles. The bounce-averaged collision term becomes

$$\langle \tilde{C}_k \rangle = \frac{1}{\lambda} \int \frac{dl}{L} \tilde{P}_k I_k(\chi_k(u, l)).$$

Evaluating these expressions is simplified by decomposing $\tilde{P}_k$ into midplane Legendre harmonics:

$$\begin{aligned} \tilde{P}_1 &= P_{1,0}, \\ \tilde{P}_3 &= -(b-1)P_{1,0} + bP_{3,0}, \\ \tilde{P}_k &= \sum_{k'=1,3,\dots}^k G_{k,k'} P_{k',0}, \end{aligned}$$

where $P_{k,0} = P_k(\cos \theta_0)$ and $G_{k,k'}$ is a polynomial in b . The collision term can now be written

as

$$\langle \tilde{C}_k \rangle = \frac{1}{\lambda} \sum_{k', k'' \text{ odd}}^k H_{k, k', k''} P_{k', 0} I_k(\chi_{k'', 0}) \Theta,$$

where

$$H_{k, k', k''} = \frac{2k+1}{2k''+1} \overline{b G_{k, k'} G_{k, k''}},$$

$\chi_{k, 0} = \chi_k(l = 0)$, and $\overline{A} = \int A dl/L$. In particular, we have

$$\langle \tilde{C}_1 \rangle = \overline{b} \frac{\cos \theta_0}{\lambda} I_1(\chi_{1, 0}) \Theta.$$

At present, we include only the $k = 1$ term, ignoring all terms $\langle \tilde{C}_{k \geq 3} \rangle$. We can estimate the error incurred by comparing the results we get for the electrical conductivity with those of Rosenbluth *et al.*¹⁵ This indicates that the relative error in χ is on the order of $0.05\sqrt{\epsilon}$ where ϵ is the inverse aspect ratio.

NUMERICAL SOLUTION

Putting all the terms in eq. (6) together, we obtain for the passing particles

$$\begin{aligned} & \frac{1}{u_0^2} \frac{\partial}{\partial u_0} u_0^2 D_{uu} \frac{\partial \chi}{\partial u_0} + F_u \frac{\partial \chi}{\partial u_0} \\ & + \frac{D_{\theta\theta}}{u_0^2} \frac{1}{\lambda \sin \theta_0} \frac{\partial}{\partial \theta_0} \sin \theta_0 \lambda \left\langle \frac{\tan^2 \theta_0}{\tan^2 \theta} \right\rangle \frac{\partial \chi}{\partial \theta_0} \\ & + \overline{b} \frac{\cos \theta_0}{\lambda} I_1(\chi_{1, 0}) + q \frac{v_0 \cos \theta_0}{\lambda} = 0. \end{aligned} \quad (9)$$

We solve this integro-differential equation numerically in the domain $0 \leq \theta_0 \leq \theta_{\text{tr}}$, with boundary condition $\chi(\theta_0 = \theta_{\text{tr}}) = 0$.

A simple magnetic field configuration with circular flux surfaces is chosen. Designating the poloidal angle by ϕ , we choose

$$\begin{aligned} R &= R_0(1 + \epsilon \cos \phi), \\ B_\zeta &= B_{\zeta 0}/(1 + \epsilon \cos \phi), \\ B_\phi &= B_{\phi 0}/(1 + \epsilon \cos \phi), \\ b &= (1 + \epsilon)/(1 + \epsilon \cos \phi). \end{aligned}$$

This gives $l/L = \phi/2\pi$, $Q = (B_{\zeta 0}/B_{\phi 0}) \times \epsilon/\sqrt{1 - \epsilon^2}$, and $L = 2\pi R_0 Q \sqrt{1 + B_{\phi 0}^2/B_{\zeta 0}^2}$.

We normalize velocities and momenta to the thermal speed $u_t = \sqrt{T/m}$, times to the inverse collision frequency ν_t^{-1} , where $\nu_t = nq^4 \times \log \Lambda / 4\pi \epsilon_0^2 m^2 u_t^3$, χ to qu_t/ν_t , efficiency η to

$q/mu_t \nu_t$. The plasma is characterized three dimensionless parameters: T/mc^2 , ϵ , and the effective ion charge state Z .

Level curves for $\chi(u_0, \theta_0)$ for a typical case are shown in fig. 1. In computing the efficiency we specialize to waves which push the particles parallel to the magnetic field. First, we suppose that the wave is absorbed in a single location in momentum space, i.e., $\mathbf{S}_0 \propto \delta(\mathbf{u}_0 - \mathbf{u}'_0) \hat{\mathbf{u}}_{0\parallel}$. The efficiency is given by $\eta = (\partial \chi / \partial u_{0\parallel}) / v_{0\parallel}$ evaluated at $\mathbf{u}'_0$. This is shown as a function of $\mathbf{u}'_0$ in fig. 2. This shows where in momentum space we should try to have waves absorbed in order to maximize the efficiency.

We consider current drive by waves which are Landau damped. We assume that the rays pierce the flux surface at a single poloidal angle ϕ' where $b = b'$, and that the wave does not alter the slope of the electron distribution appreciably. In this case, we have $\mathbf{S} \propto f_m \delta(v_{\parallel} - v_{\text{ph}}) \delta(\phi - \phi') \hat{\mathbf{u}}_{\parallel}$ and the bounce-averaged flux is given by $\lambda \mathbf{S}_0 \propto f_m \delta(v_0 \cos \theta' - v_{\text{ph}}) \hat{\mathbf{u}}_{0\parallel}$, where $\sin^2 \theta' = b' \sin^2 \theta_0$. The current drive efficiency can be calculated by inserting this form for $\mathbf{S}_0$ into eqs. (3) and (7) and performing the integrals numerically. The resulting efficiencies are given in fig. 3. This confirms that toroidal effects reduce the efficiency of current drive and that this reduction can be minimized if the waves are absorbed on the high-field side of the torus where there are fewest trapped particles.

ACKNOWLEDGEMENTS

The authors would like to thank Dave Ehst, Steve Hirshman, and Dieter Sigmar for enlightening discussions. This work was supported by the U.S. Department of Energy under contract DE-AC02-76-CHO-3073.

REFERENCES

- ¹S. P. Hirshman, Phys. Fluids **23**, 1238 (1980).
- ²M. Taguchi, J. Phys. Soc. Jpn **51**, 1975 (1982).
- ³T. M. Antonsen, Jr. and K. R. Chu, Phys. Fluids **25**, 1295 (1982).
- ⁴M. Taguchi, J. Phys. Soc. Jpn **52**, 2035 (1983).
- ⁵T. M. Antonsen, Jr. and B. Hui, IEEE Trans. Plasma Sci. **PS-12**, 118 (1984).
- ⁶K. Yoshioka, T. M. Antonsen, Jr., and E. Ott, Nucl. Fusion **26**, 439 (1986).
- ⁷K. Yoskioka and T. M. Antonsen, Jr., Nucl. Fusion **26**, 839 (1986).
- ⁸V. S. Chan, Phys. Fluids **30**, 3526 (1987).
- ⁹G. Giruzzi, Nucl. Fusion **27**, 1934 (1987).
- ¹⁰R. H. Cohen, Phys. Fluids **30**, 2442 (1987).
- ¹¹S. T. Beliaev and G. I. Budker, Sov. Phys.-Dokl. **1**, 218 (1956).
- ¹²B. J. Braams and C. F. F. Karney, Phys. Rev. Lett. **59**, 1817 (1987).
- ¹³B. J. Braams and C. F. F. Karney, Phys. Fluids **1B**, 1355 (1989).
- ¹⁴G. D. Kerbel and M. G. McCoy, Phys. Fluids **28**, 3629 (1985).
- ¹⁵M. N. Rosenbluth, R. D. Hazeltine, and F. L. Hinton, Phys. Fluids **15**, 116 (1972).

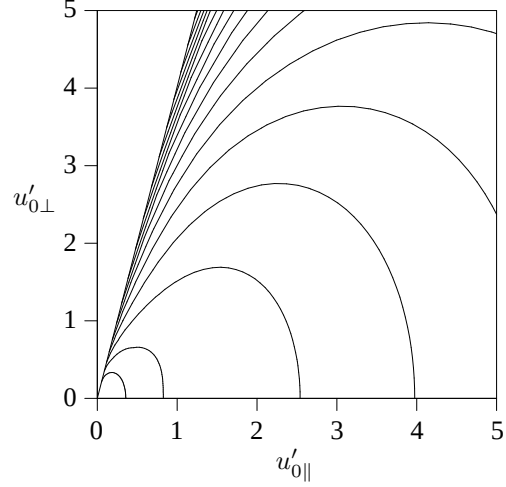


Figure 2: Contour plot of efficiency η of current drive with point excitation of the rf, i.e., $\mathbf{S}_0 \propto \delta(\mathbf{u}_0 - \mathbf{u}'_0)\hat{\mathbf{u}}_{0||}$. Here, $Z = 1$, $\epsilon = 0.03$, and $T/mc^2 = 0.05$. The levels of the contours are given by $\eta = 2j$ for integer $j \geq 1$ increasing from the origin outwards.

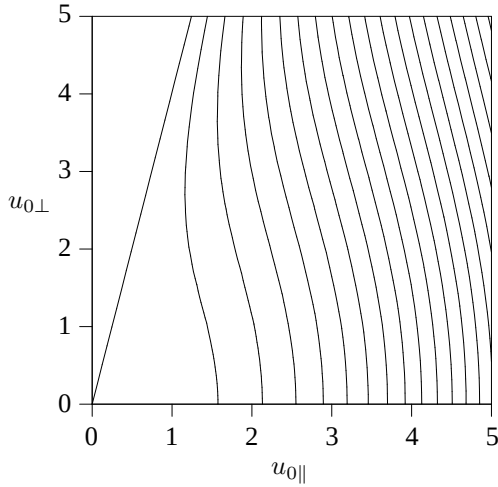


Figure 1: Contour plot of $\chi(u_0, \theta_0)$ for $Z = 1$, $\epsilon = 0.03$, and $T/mc^2 = 0.05$. The levels of the contours are given by $\chi = 5j$ for integer $j \geq 0$ increasing from left to right.

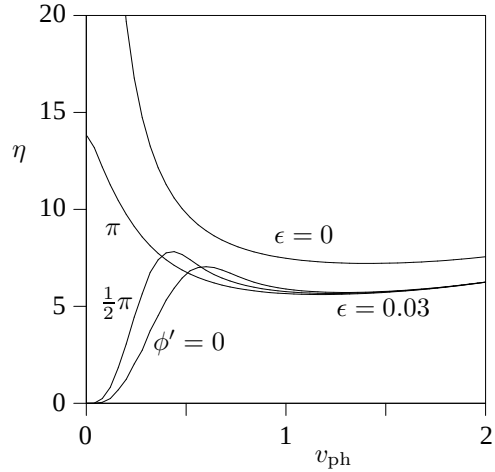


Figure 3: Efficiencies for current drive by Landau-damped waves for $Z = 1$, and $T/mc^2 = 0.05$. The top curve gives the efficiency for the case of a uniform magnetic field $\epsilon = 0.0$. The other curves are for $\epsilon = 0.03$ and three different poloidal angles ϕ' at which the wave is absorbed.